



60NM

$\Phi 6.35 \times 32\text{mm}$ RoHS Compliant & Pb-Free
CERAMIC TUBE FUSE (NORMAL-BLOW)
瓷保险丝管 (普通型)

BREAKING CAPACITY/ 分断能力:

2500A at 75V AC
2000A at 125V AC
1500A at 250V AC

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证			REFERENCE (A ² Sec.) (RoHS) I ² T 参考值
		cURus			
		H	L	L1	
60NM-250H/L/L1	25A	●	●	●	2149
60NM-300H/L/L1	30A	●	●	●	2748
60NM-400H/L/L1	40A	●	●	●	8099
60NM-500H/L/L1	50A	●	●	●	12199

● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V H 表示 250V AC
L DENOTES FOR 125V L 表示 125V AC
L₁ DENOTES FOR 75V L₁ 表示 75V AC

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
100%	4 hour Min.
200%	120c. Maximum

Standards/ 标准: UL 248-1, UL 248-14

Operating Temperature/ 工作温度: -55°C ~125°C


Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s±0.5s

Dimensions/ 尺寸:

Unit 单位: mm

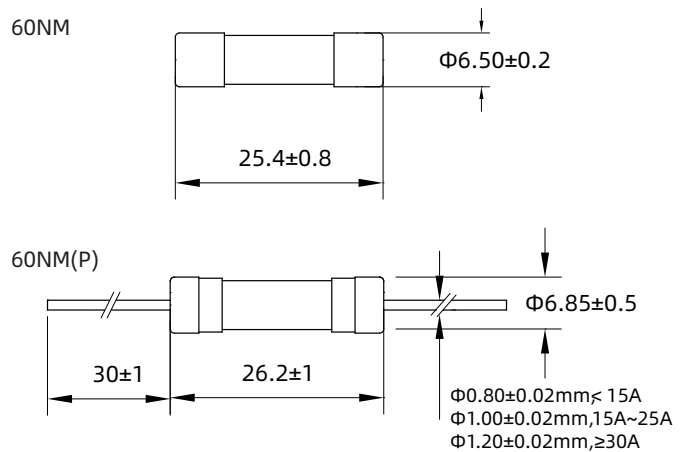

60NM AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

60NM 平均 I-T 曲线图 (仅供参考)

