



H4FG 1500V DC 400A-2000A

Semiconductor Fuses

半导体保护熔断器



Standard/ 标准: UL 248-13, IEC 60269-4, GB/T 13539.4

INTERRUPTING CAPACITY/ 分断能力:
250,000 amperes at 1500V DC

TECHNICAL PARAMETERS/ 技术参数:


PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证		
		cURus	TUV	UKCA
H4FG400	400A	●	●	●
H4FG500	500A	●	●	●
H4FG630	630A	●	●	●
H4FG700	700A	●	●	●
H4FG800	800A	●	●	●
H4FG900	900A	●	●	●
H4FG1000	1000A	●	●	●
H4FG1100	1100A	●	●	●
H4FG1250	1250A	●	●	●
H4FG1500	1500A	●	●	●
H4FG1600	1600A	●	●	●
H4FG1800	1800A	●	●	●
H4FG2000	2000A	●	●	●

● DENOTES FOR APPROVAL ● 表示已取得安全认证
○ DENOTES FOR PENDING ○ 表示正在申请安全认证

Dimensions/ 尺寸:

Unit 单位: mm

Type:H4FG Part No.: H4FG(amp rating)

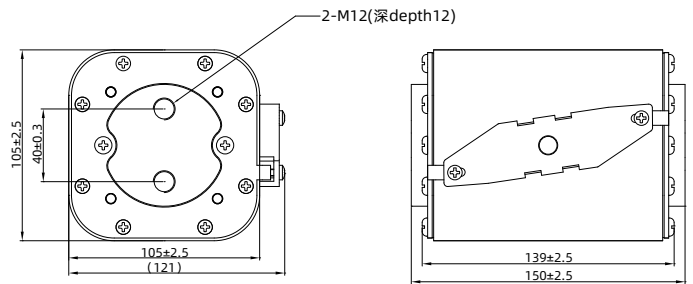

H4FG 平均 I-T 曲线图 (仅供参考)
AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

