



HBA 70A-400A

Class of operation: aR

保护特性: aR



Standard/ 标准: IEC 60269-4, GB/T 13539.4, UL 248-13

INTERRUPTING CAPACITY / 分断能力:

100,000 A at 150V AC

20,000 A at 150V DC

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		cURus	
HBA70	70A	●	
HBA80	80A	●	
HBA100	100A	●	
HBA125	125A	●	
HBA150	150A	●	
HBA200	200A	●	
HBA250	250A	●	
HBA300	300A	●	
HBA350	350A	●	
HBA400	400A	●	

● DENOTES FOR APPROVAL


○ DENOTES FOR PENDING

● 表示已取得安全认证

○ 表示正在申请安全认证

Dimensions/ 尺寸:

Unit 单位: mm

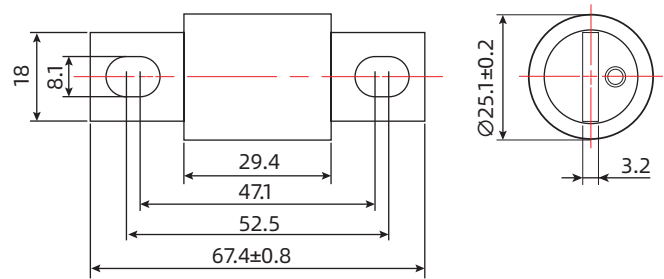

HBA 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

