



HC10NM 20A-50A (空调专用)

Class of operation: gR

保护特性: gR



Standard/ 标准: IEC 60269-4, GB/T 13539.4, UL 248-13

INTERRUPTING CAPACITY / 分断能力:

50,000 A at 500V AC (IEC)

50,000 A at 400V AC (UL)

10,000 A at 250V AC

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证		
		CCC	TUV	cURus
10NM20	20A	●	●	●
10NM25	25A	●	●	●
10NM30	30A	●	●	●
10NM32	32A	●	●	●
10NM35	35A	●	●	●
10NM40	40A	●	●	●
10NM50	50A	○	○	○

● DENOTES FOR APPROVAL

○ DENOTES FOR PENDING

● 表示已取得安全认证


○ 表示正在申请安全认证

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
113%	1 hour Min.	最快 1 小时
160%	1 hour Max.	最慢 1 小时

Dimensions/ 尺寸:

Unit 单位: mm

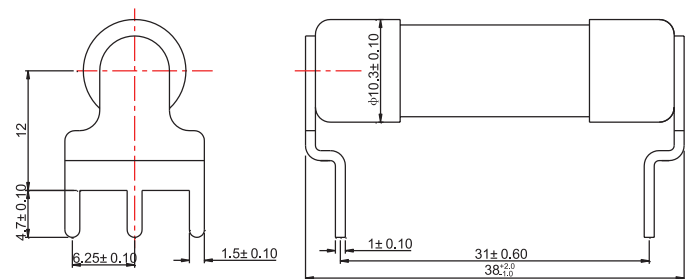

HC10NM 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

