

HC10PV 1A-30A Photovoltaic Fuse 光伏熔断器




Standard/ 标准: UL 248-19

INTERRUPTING CAPACITY / 分断能力:
30,000 A at 1000V DC

Dimensions/ 尺寸:

Unit 单位: mm

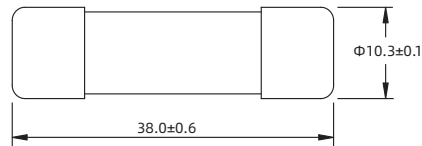

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		UL	cULus
10PV1U0	1A	●	○
10PV2U0	2A	●	○
10PV3U0	3A	●	○
10PV3.5U0	3.5A	●	○
10PV4U0	4A	●	○
10PV5U0	5A	●	○
10PV6U0	6A	●	○
10PV8U0	8A	●	○
10PV10U0	10A	●	○
10PV12U0	12A	●	○
10PV15U0	15A	●	○
10PV16U0	16A	●	○
10PV20U0	20A	●	○
10PV25U0	25A	○	●
10PV30U0	30A	○	●

U0 DENOTES FOR 1000V DC
● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING

U0 表示 1000V DC
● 表示已取得安全认证
○ 表示正在申请安全认证

Recommended fuse-base for 10.3mmx38mm fuses

See Model of product: HC101D HF-103D HF-104A

适用于 10.3mmx38mm 熔断体的支持件

详见产品型号: HC101D HF-103D HF-104A



ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间
135%	1 hour Max. 最慢 1 小时
200%	240 seconds Max. 最慢 240 秒

HC10PV 平均 I-T 曲线图 (仅供参考)

AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)

