



NH2MgS 900V AC 200A-400A

Class of Operation: gS



Standard/ 标准: IEC 60269-4, GB/T 13539.4

INTERRUPTING CAPACITY/ 分断能力:
50,000 A at 900V AC

TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		TUV	CCC
2MgS200U9	200A	●	●
2MgS225U9	225A	●	●
2MgS250U9	250A	●	●
2MgS315U9	315A	●	●
2MgS350U9	350A	●	●
2MgS400U9	400A	●	●


U9 DENOTES FOR 900V AC
● DENOTES FOR APPROVAL
○ DENOTES FOR PENDING

U9 表示 900V AC
● 表示已取得安全认证
○ 表示正在申请安全认证

Dimensions/ 尺寸:


Unit 单位: mm

Type:N:NH2MgS Part No.:2MgS(amp rating)U9

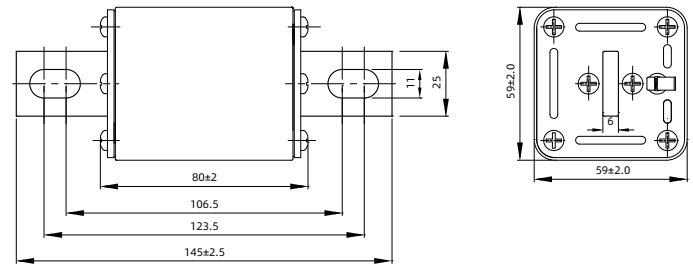

NH2MgS 平均 I-T 曲线图 (仅供参考)

NH2MgS AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE)

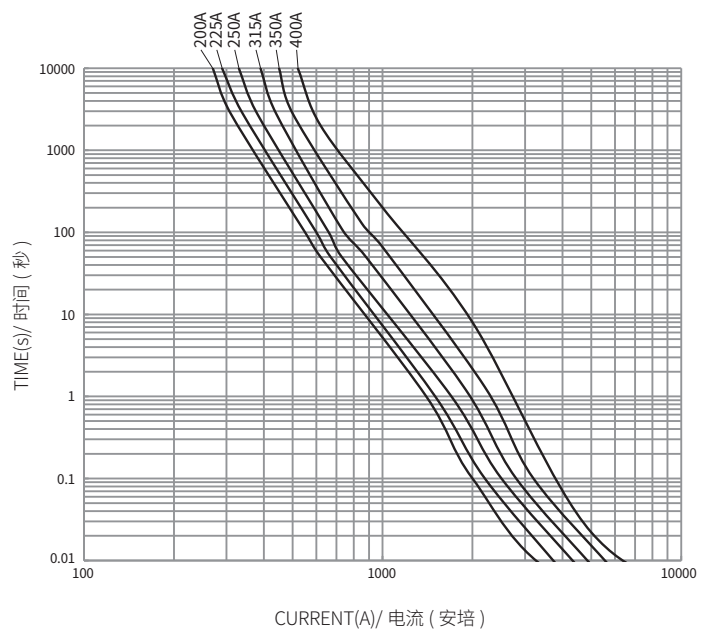

CURRENT(A)/ 电流 (安培)

Rating 额定	CONVENTIONAL TIME(H) 约定时间	ONVENTIONAL CURRENT 约定电流	
		ONVENTIONAL NON-FUSING CURRENT(A) 约定不熔断电流	ONVENTIONAL FUSING CURRENT(A) 约定熔断电流
160 < In ≤ 400	3	1.25In	1.6In