



# NH2XLaR-F 1500V DC 125A-420A

Class of Operation: aR

保护特性: aR




Standard/ 标准: UL 248-13, IEC 60269-4, GB/T 13539.4

INTERRUPTING CAPACITY/ 分断能力:  
150,000 A at 1500V DC


Dimensions/ 尺寸:

Unit 单位: mm


Type: NH2XLaR-F Part No.: 2XLaRF(amp rating)U15

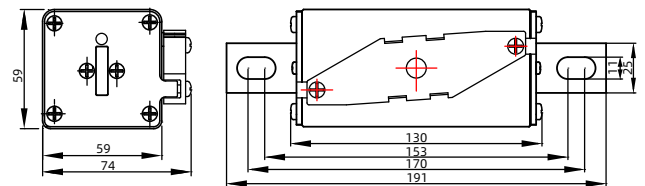

Type: NH2XLaR-F Part No.: 2XLaRF(amp rating)U15B

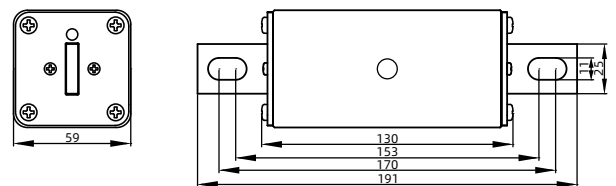

Type: NH2XLaR-F Part No.: 2XLaRF(amp rating)U15C

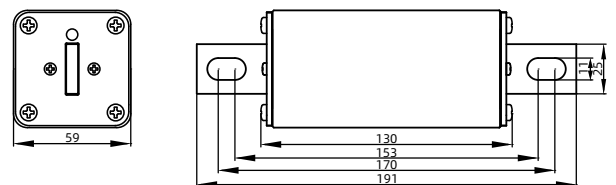

## TECHNICAL PARAMETERS/ 技术参数:

PART NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证	
		cURus	
2XLaRF125U15	125A	●	●
2XLaRF125U15B		●	●
2XLaRF125U15C		●	●
2XLaRF160U15	160A	●	●
2XLaRF160U15B		●	●
2XLaRF160U15C		●	●
2XLaRF200U15	200A	●	●
2XLaRF200U15B		●	●
2XLaRF200U15C		●	●
2XLaRF250U15	250A	●	●
2XLaRF250U15B		●	●
2XLaRF250U15C		●	●
2XLaRF315U15	315A	●	●
2XLaRF315U15B		●	●
2XLaRF315U15C		●	●
2XLaRF350U15	350A	●	●
2XLaRF350U15B		●	●
2XLaRF350U15C		●	●
2XLaRF400U15	400A	●	●
2XLaRF400U15B		●	●
2XLaRF400U15C		●	●
2XLaRF420U15	420A	●	●
2XLaRF420U15B		●	●
2XLaRF420U15C		●	●

B- 螺栓连接带中央指示器	Bolted with central indicator
C- 螺栓连接不带中央指示器	Bolted connection without central indicator
U15 DENOTES FOR 1500V DC	U15 表示 1500V DC
● DENOTES FOR APPROVAL	● 表示已取得安全认证
○ DENOTES FOR PENDING	○ 表示正在申请安全认证

## NH2XLaR-F 1500V 平均 I-T 曲线图 (仅供参考)

NH2XLaR-F 1500V AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE)

